


Sundance® Spas 980™ Claremont™

Specifications

Dimensions:	92" x 100" x 32" (234 cm x 254 cm x 82 cm)
Seating Capacity:	6 Adults
Dry Weight:	1,170 lbs (531 kg)
Filled Weight (Average Fill)**:	4,256 lbs (1,931 kg)
Water Capacity (Average Fill):	370 US Gal (1,401 Liters)
Controls:	980 Glass Touchscreen Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features; Auxiliary Control Panel for Jets Pumps and Blower
Water Delivery:	3 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 3:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 4:	High-Output Dynamic Flow, 24-Hour programmable, factory default set to 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	64
Seat A Jets:	4 Fluidix Nex, 6 Fluidix Reflex, 2 Adjustable Accu-Pressure, 8 Focus-Relief®, 2 Vortex
Seat B Jets:	2 Fluidix Reflex, 2 Vortex Mini
Seat C Jets:	4 Fluidix Nex, 12 Fluidix-ST, 2 Accu-Pressure
Seat D Jets:	2 Fluidix Reflex, 1 Fluidix Intelli-Jet
Seat E Jets:	4 Fluidix Nex, 4 Fluidix Reflex, 2 Fluidix PT, 2 Accu-Pressure
Seat F Jets:	2 Vortex
Footwell Jets (G):	2 Whirlpool
Air Blower:	High-efficiency, 1-Speed
Aromatherapy Delivery:	6 Silent Air® Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	5/2
Filter:	MicroClean® Ultra II Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Dynamic Flow Circulation System; Factory installed ClearRay Active Oxygen® System; Optional True Water™ System Export: ClearRay Active Oxygen® System
Lighting:	Multicolored LED Lighting System (1 Waterfall, 2 Footwell, Diverters, and Air Controls), SunCooler Bin Lights, Pillow Accent Lights; Exterior lighting (white only)
Synthetic Cabinet:	Evening Shadow, Walnut
Shell Colors:	Platinum, Celestite, Morning Mist, Midnight, Travertine
Headrests:	3
Heater:	Low Flow 5.5 kW With Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@50A or 60A; Export (50 Hz): 230-240 VAC@1x32A, 1x40A, 1x16A/1x20A, 3x16A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 10 Years Metal & Synthetic Frame, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year True™ Water System, 1 Year Stereo Export (50 Hz): 10 Years Shell, 10 Years Metal & Synthetic Frame, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo, 1 Year True™ Water System
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Standard):	BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 2 XL premium speakers and a powered subwoofer
Special Features (Standard):	SmartTub® module
Special Features (Standard):	Inductive Charger

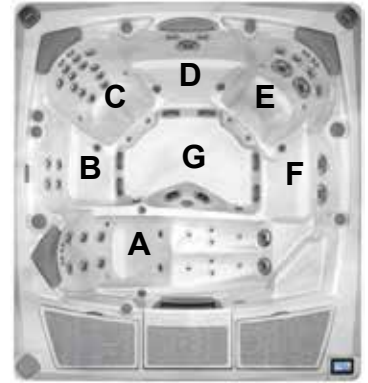


*(See Warranty Document for Specific Details)

** (See Important Safety Instructions for Specific Details)


Sundance Spas 980 Claremont

Operation/Seat Depths

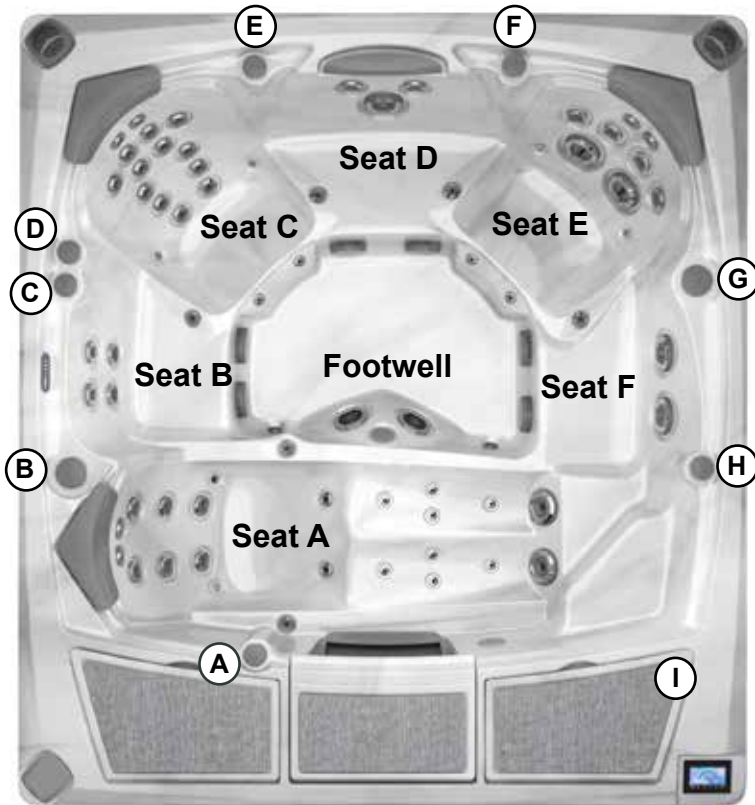

- (A)** Air Control - Activates Seat A Jets (4 Fluidix Nex, 6 Fluidix Reflex, 2 Adj. Accu-Pressure, 2 Vortex)
- (B)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat A Jets and Footwell Jets
- (C)** AccuSage Seat Air Valve - Adjusts the Lower Seat C (2 Fluidix Nex, 4 Fluidix-ST, 2 Accu-Pressure)
- (D)** AccuSage Seat Air Valve - Adjusts the Upper Seat C (2 Fluidix Nex, 8 Fluidix-ST)
- (E)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
- (F)** Air Control - Activates Seat B Jets (2 Fluidix Reflex, 2 Vortex Mini), Seat D (2 Fluidix Reflex, 1 Fluidix Intelli-Jet), Seat E Jets (4-Fluidix Nex, 4 Fluidix Reflex, 2 Fluidix PT, 2 Accu-Pressure) and Seat F Jets (2 Vortex)
- (G)** Massage Selector [Pump 1] - Adjusts Massage Level Between the Seat E Jets and Seat B Jets + Seat D Jets
- (H)** Air Control - Activates Footwell Jets (2 Whirlpool Jets)
- (I)** SunScents Dispenser (located under the SunCooler Lid)

63 Total Jets

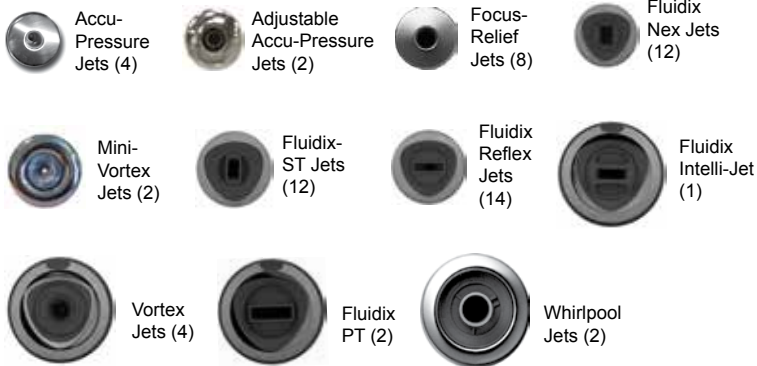

- Jets Pump 3: Seat C and Footwell Dump Port
- Jets Pump 2: Seat A (2 Vortex Jets) are always on when this pump is running.
- Jets Pump 1: Seat F (2 Vortex) are always on when this pump is running.
- Focus-Relief Jets: Work with both the blower and Jets Pump 2. The blower introduces air to the jet and the Jets Pump forces water through.


Spa Operation Subject To Change Without Notice

SEAT DEPTHS

A = 26.00" (66.04 cm)
B = 21.00" (53.54 cm)
C = 26.75" (67.95 cm)
D = 21.00" (53.34 cm)
E = 24.50" (62.23 cm)
F = 20.50" (52.07 cm)

G = 9.00" (22.86 cm)
H = 31.00" (78.74 cm)
SunCooler Bin Depth
I = 9.50" (24.13 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance $\pm 0.5"$ (1.27 cm).**

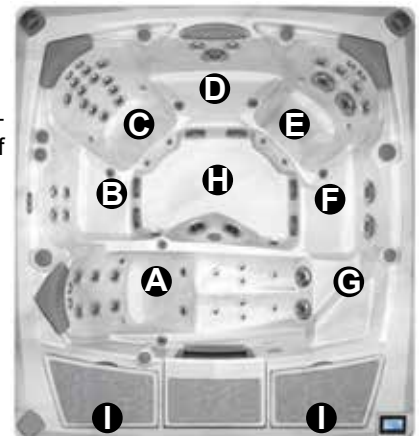


Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Claremont

Portable Dimensions

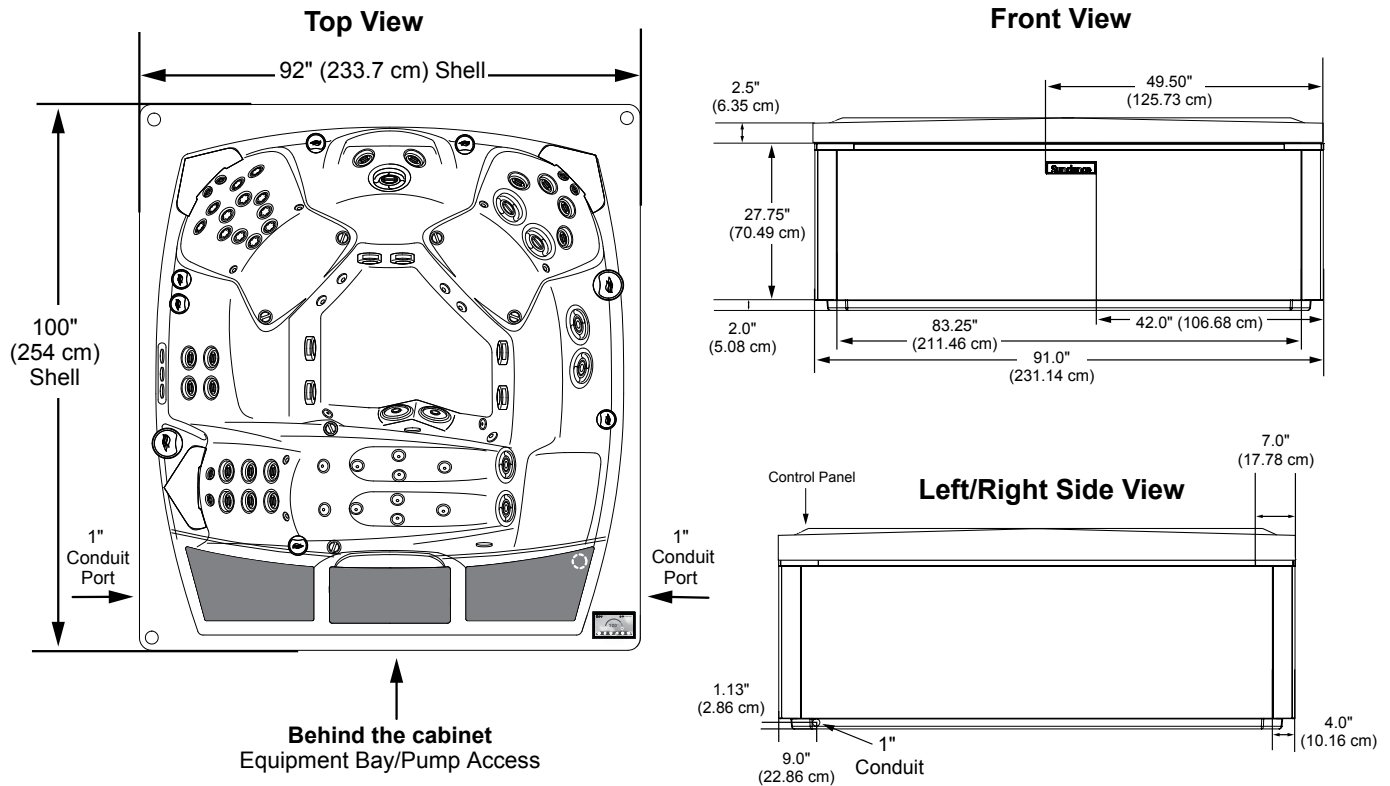

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

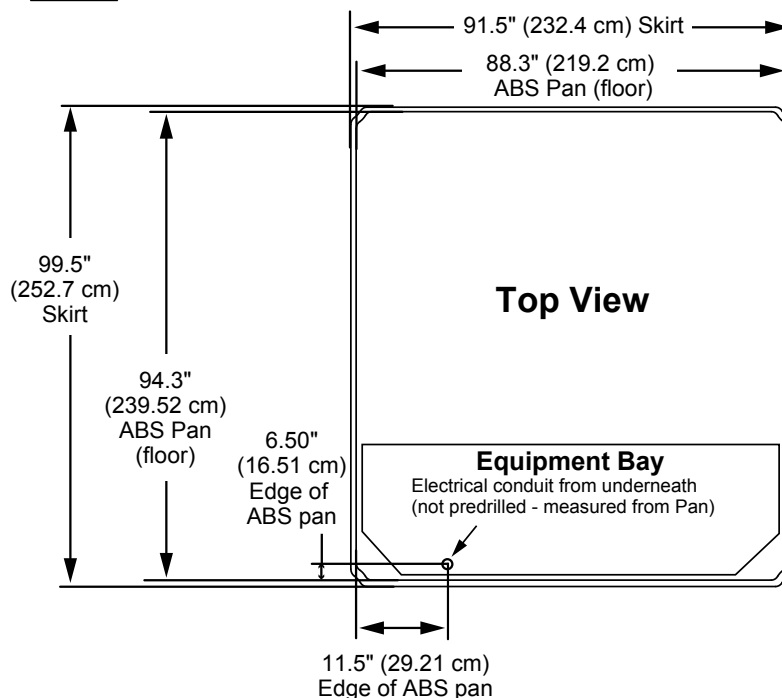

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice