

Sundance® Spas 980 Kingston™

Specifications

Dimensions:	92" x 100" x 32" (234 cm x 254 cm x 82 cm)
Seating Capacity:	7-8 Adults
Dry Weight:	1,215 lbs (552 kg)
Filled Weight (Average Fill)**:	4,176 lbs (1,895 kg)
Water Capacity (Average Fill):	355 US Gal (1,344 Liters)
Controls:	980 Glass Touchscreen Control, Displays Temperature, Time, Cycles and Jet/Air System Control. Offers Customizing of Filtration Cycles, Lighting, Water Temperature Setting and other features; Auxiliary Control Panel for Jets Pumps and Blower
Water Delivery:	3 TheraMax High-Flow Pumps and 8-Hour Dynamic Flow Circulation System
Pump 1:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 2:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 3:	North America (60 Hz): 1-Speed/2.5 HP Continuous, 11.3A Max., 56 Frame Export (50 Hz): 1-Speed/2.0 HP Continuous, 7A Max.
Pump 4:	High-Output Dynamic Flow, 24-Hour programmable, factory default set to 8-Hour Filter/Circulation Pump (35 gpm) Programmable for Daily Start Time and Duration
Total Hydrojets:	63
Seat A Jets:	2 Fluidix Nex, 6 Fluidix Reflex, 2 Adjustable Accu-Pressure, 2 Accu-Pressure
Seat B Jets:	2 Fluidix Reflex, 2 Vortex Mini
Seat C Jets:	4 Fluidix Nex, 12 Fluidix-ST, 2 Accu-Pressure
Seat D Jets:	2 Fluidix Reflex, 1 Fluidix Intelli-Jet
Seat E Jets:	4 Fluidix Nex, 4 Fluidix Reflex, 2 Fluidix PT, 4 Accu-Pressure
Seat F Jets:	2 Vortex
Seat G Jets:	2 Vortex, 2 Fluidix PT, 2 Accu-Pressure
Footwell Jets (H):	8 Accu-Pressure, 1 Vortex, 1 Accu-Pressure (side wall)
Air Blower:	High-efficiency, 1-Speed
Aromatherapy Delivery:	8 Silent Air® Injector Jets with Quiet High Speed Air Pump
Air Controls/Massage Selectors:	5/2
Filter:	MicroClean® Ultra II Filtration System, 130 ft² (2 interlocking cartridge filters)
Water Treatment:	Dynamic Flow Circulation System; Factory installed ClearRay Active Oxygen® System; Optional True Water™ System Export: ClearRay Active Oxygen® Syste
Lighting:	Multicolored LED Lighting System (1 Waterfall, 2 Footwell, Diverters, Air Controls), SunCooler Bin Lights, Pillow Accent Lights, Exterior lighting (white only)
Synthetic Cabinet:	Evening Shadow, Walnut
Shell Colors:	Platinum, Celestite, Morning Mist, Midnight, Travertine
Headrests:	4
Heater:	Low Flow 5.5 kW With Titanium Element Export (50 Hz): Low Flow 2.7 kW with Titanium Element
Electrical Requirements:	North America (60 Hz): 240 VAC@50A or 60A; Export (50 Hz): 230-240 VAC@1x32A, 1x40A, 1x16A/1x20A, 3x16A (see manual for more configurations); or Suitable Rated Circuit Breaker To Comply With Local Electrical Regulations. Certain Countries May Require 2 Power Inputs; Two GFCI/RCD Breakers are Required For This Configuration.
Limited Warranty*:	North America (60 Hz): 10 Years Shell, 10 Years Metal & Synthetic Frame, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 1 Year Stereo, Export (50 Hz): 10 Years Shell, 10 Years Metal & Synthetic Frame, 7 Years Shell Surface, 5 Years Plumbing Component Leaks, 5 Years Equipment and Controls, 5 Years Cabinet, 5 Years Jets, 2 Years Lights, 2 Years Stereo
Waterfall Feature:	Adjustable Flow Rate; Colored Lighting
Audio System (Standard):	BLUEWAVE® 2.0 Wireless Spa Stereo System with Auxiliary 3.5 mm headphone jack connection, Bluetooth® compatible, 2 XL premium speakers and a powered subwoofer
Special Features (Standard):	SmartTub® module
Special Features (Standard):	Inductive Charger




*(See Warranty Document for Specific Details)


***(See Important Safety Instructions for Specific Details)

Sundance Spas 980 Kingston

Operation/Seat Depths

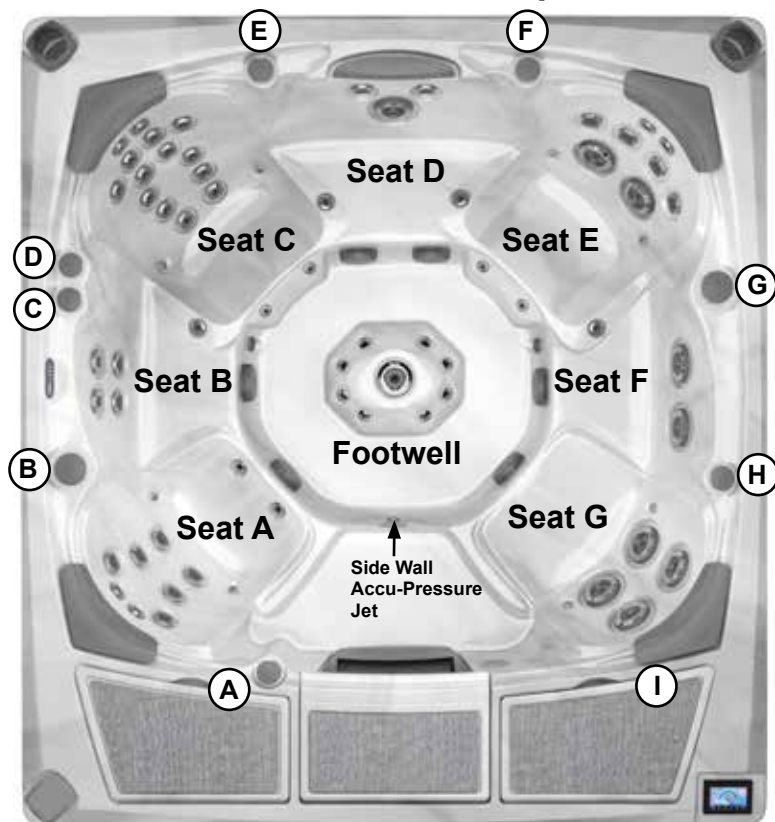

63 Total Jets

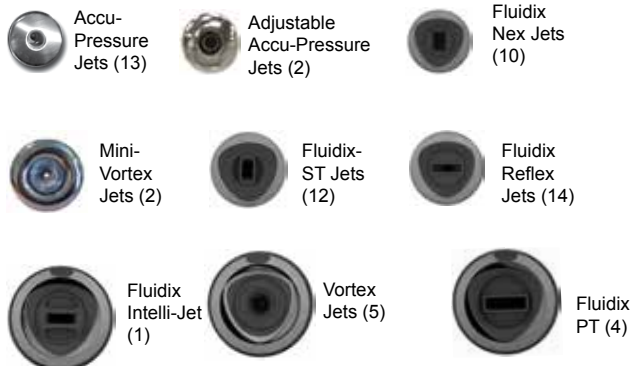

Spa Operation Subject To Change Without Notice

- (A)** Air Control - Activates Seat A Jets (2 Fluidix Reflex, 6 Fluidix Reflex, 2 Adj. Accu-Pressure, 2 Accu-Pressure) and Seat B Jets (2 Fluidix Reflex, 2 Vortex Mini) and Seat D Jets (2 Fluidix Reflex, 1 Fluidix Intelli-Jet), and Footwell (2 Accu-Pressure, 1 Vortex)
 - (B)** Massage Selector [Pump 2] - Adjusts Massage Level Between Seat A Jets + 2 Footwell (2 Accu-Pressure) and Seat B Jets + Seat D Jets
 - (C)** AccuSage Seat Valve - Adjusts Flow for Lower Seat C Jets (2 Fluidix Nex, 4 Fluidix-ST, 2 Accu-Pressure Jets) + Footwell (2 Accu-Pressure)
 - (D)** AccuSage Seat Valve - Adjusts Flow for Upper Seat C Jets (2 Fluidix Nex, 4 Fluidix Reflex) and Footwell (2 Accu-Pressure)
 - (E)** Waterfall Selector [8-Hour Circ. Pump] - Controls Waterfall Output
 - (F)** Air Control - Activates Seat E Jets (4 Fluidix Nex, 4 Fluidix Reflex, 2 Fluidix PT, 2 Accu-Pressure) + 2 Footwell (2 Accu-Pressure) and Seat F (2 Vortex)
 - (G)** Massage Selector [Pump 1] - Adjusts Massage Level Between the Seat E Jets + Footwell (2 Accu-Pressure) and Seat G Jets + Footwell (2 Accu-Pressure)
 - (H)** Air Control - Activates Seat G Jets (2 Vortex, 2 Fluidix PT) + 2 Footwell (2 Accu-Pressure)
 - (I)** SunScents Dispenser
- Jets Pump 3: Seat C Jets + 2 Footwell Jets (2 Accu-Pressure)
 - Jets Pump 2: Center Footwell Jet (1 Vortex) is always on when this pump is running.
 - Jets Pump 1: Seat F (2 Vortex) + 1 Accu-Pressure Jet (Footwell Side Wall) are always on when this pump is running.

SEAT DEPTHS

A = 23.25" (59.01 cm)
B = 21.00" (53.34 cm)
C = 26.50" (67.31 cm)
D = 20.50" (52.07 cm)
E = 24.50" (62.23 cm)
F = 20.50" (52.07 cm)

G = 22.00" (55.88 cm)
H = 18.50" (46.99 cm)
I = 29.75" (75.57 cm)
SunCooler Bin Depth
J = 9.50" (24.13 cm)


Listed dimensions represent distance from top of acrylic to lowest point in seat. **Tolerance ± 0.5" (1.27 cm).**




Dimensions/Specifications Subject To Change Without Notice

Sundance Spas 980 Kingston

Portable Dimensions

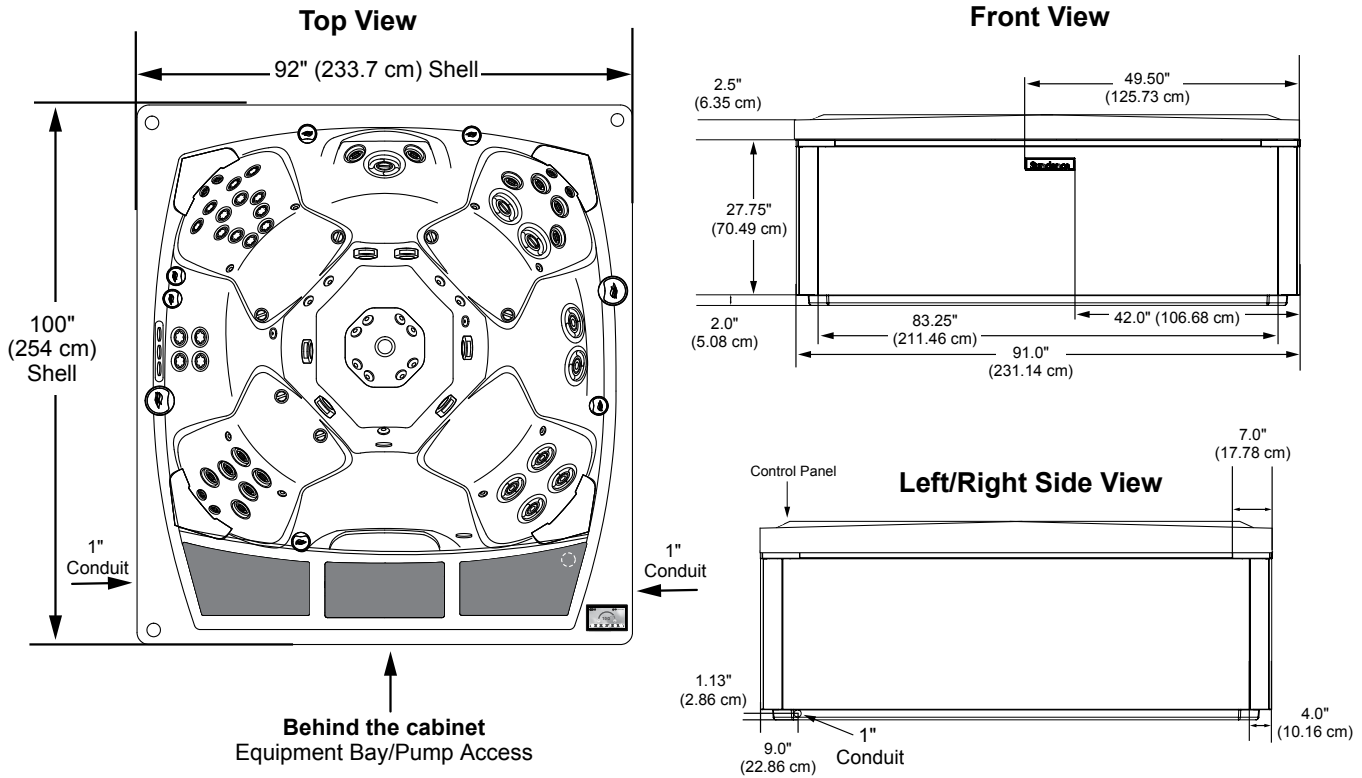

IMPORTANT! Always measure each hot tub for exact dimensions BEFORE designing its foundational support and/or decking.

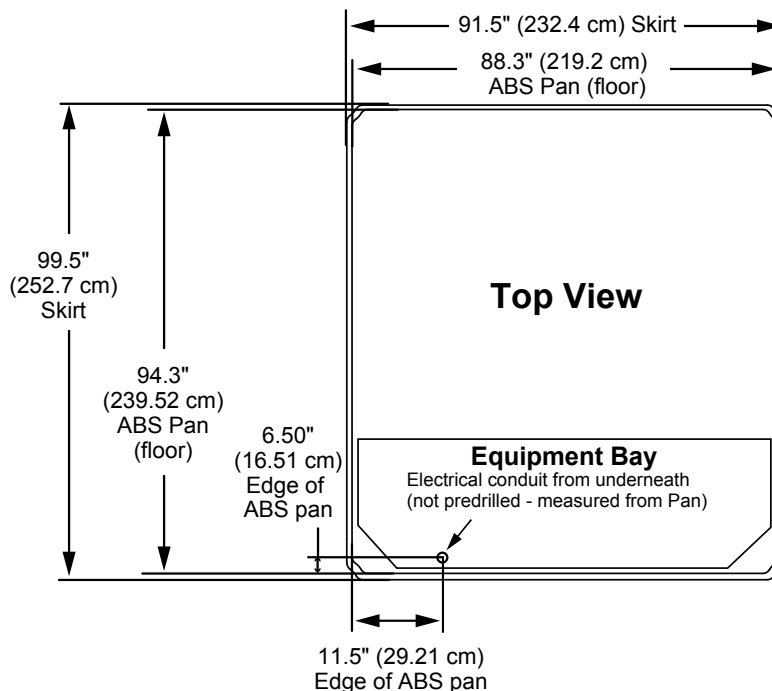

Dimensions/specifications subject to change without notice. Tolerance: $\pm 0.5"$ (1.27 cm)

Dimensions/Specifications Subject To Change Without Notice